




Stack Curved

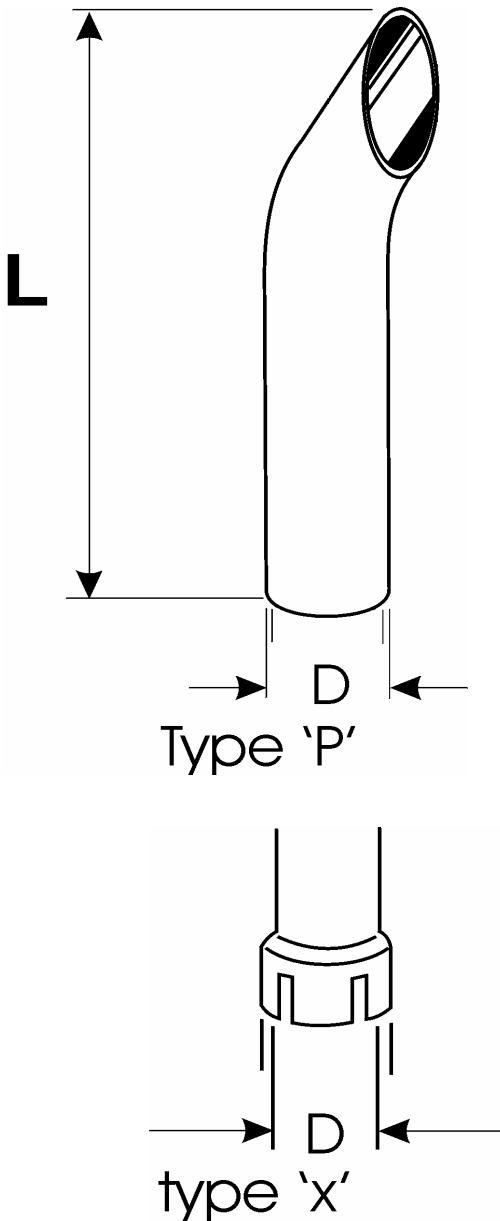

Diameter		Length		Chrome	Alum.	S/S
inches	mm	feet	mm	P/No	P/No	P/No
3	76	2	610	2730	2730A	2730S
3	76	3	915	2731	2731A	2731S
3	76	4	1220	2732	2732A	2732S
3	76	5	1525	2733	2733A	2733S
3	76	6	1830	2734	2734A	2734S
3½	89	2	610	2740	2740A	2740S
3½	89	3	915	2741	2741A	2741S
3½	89	4	1220	2742	2742A	2742S
3½	89	5	1525	2743	2743A	2743S
3½	89	6	1830	2744	2744A	2744S
4	102	2	610	2750	2750A	2750S
4	102	3	915	2751	2751A	2751S
4	102	4	1220	2752	2752A	2752S
4	102	5	1525	2753	2753A	2753S
4	102	6	1830	2754	2754A	2754S
5	127	2	610	2760	2760A	2760S
5	127	3	915	2761	2761A	2761S
5	127	4	1220	2762	2762A	2762S
5	127	5	1525	2763	2763A	2763S
5	127	6	1830	2764	2764A	2764S
6	152	2	610	2770	2770A	2770S
6	152	3	915	2771	2771A	2771S
6	152	4	1220	2772	2772A	2772S
6	152	5	1525	2773	2773A	2773S
6	152	6	1830	2774	2774A	2774S

(P - Plain)
(X - Expanded/Notched)

Add the letter 'X' to the part number if an expanded and notched end is required, or add the letter 'P' if a plain end is required.

Customer special stacks may be made to firm order.
 (No Returns)

Chromium plated is to Australian Standard AS1192-1973 service condition 4.